

# 8025B DC axial flow fan

8025B DC Axial Flow Fan — 80.0× 80.0× 25.0 mm

## ★ Structural Features

### Frame & Blade Material


- Frame: Aerospace Plastic
- Impeller: Aerospace Plastic

Bearing Structure: Dual Ball Bearings


Weight: 110.0 g



## ★ Mechanical Dimensions

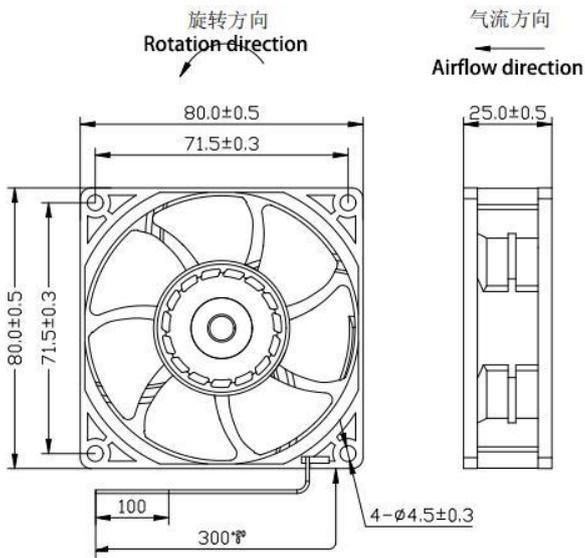

## ★ Airflow Performance Curve

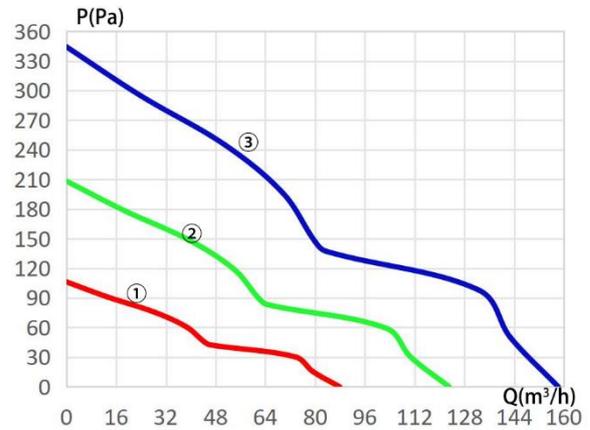

## Basic Fan Specifications

Model	Voltage (V)	Operating Voltage Range (V)	Power (W)	Speed (RPM)	Airflow (m³/h)	Static Pressure (Pa)	Noise (dBA)	Curve
J80FZW150-25B00	12	8.0~13.8	4.0	5000	87.9	106.3	44.5	①
J80FZW170-25B00	12	8.0~13.8	7.5	7000	123.1	208.4	51.8	②
J80FZW190-25B00	12	8.0~13.8	15.1	9000	158.2	344.4	57.2	③
J80FZW250-25B00	24	16.0~27.6	4.0	5000	87.9	106.3	44.5	①
J80FZW270-25B00	24	16.0~27.6	7.5	7000	123.1	208.4	51.8	②
J80FZW290-25B00	24	16.0~27.6	15.1	9000	158.2	344.4	57.2	③
J80FZW350-25B00	28	18.0~32.0	4.0	5000	87.9	106.3	44.5	①
J80FZW370-25B00	28	18.0~32.0	7.5	7000	123.1	208.4	51.8	②
J80FZW390-25B00	28	18.0~32.0	15.1	9000	158.2	344.4	57.2	③

## Notes:

- In the model number, the **second digit from the end “0”** indicates the **signal function**, and the **last digit “0”** indicates the **environmental performance rating**.
- Users may select according to actual requirements based on **Table 1** and **Table 2**.
- Available voltage options: **5V, 12V, 24V, 28V, 48V**

**Table 1: Signal Functions**

Signal function code	0	1	2	3	4	5
Function Description	No Function	PWM Duty Cycle Speed Control	High-Level Fault Alarm	Tachometer (RPM) Feedback	PWM Duty Cycle Control + High-Level Fault Alarm	PWM Duty Cycle Control + Tachometer Feedback

**Table 2: Environmental Adaptability Ratings**

Code	Application Standard	0 (Ground Vehicle-Mounted)	1 (Marine / Naval Applications)	2 (Airborne Applications)	
High Temperature	GJB150.3A-2009	Storage: 80°C, Operation: 75°C		Storage: 95°C, Operation: 85°C	
Low Temperature	GJB150.4A-2009	Storage: -50°C, Operation: -40°C		Storage: -60°C, Operation: -55°C	
Rain / Water Ingress	GJB150.8A-2009	Enhanced, 1 hour per surface			
Damp Heat (Humidity)	GJB150.9A-2009	Cyclic humidity: 30°C-60°C, RH 95%±5%, 24h per cycle, 10 cycles			
Fungus Resistance	GJB150.10A-2009	Fungus group 1 or group 2, 28 days			
Salt Spray	GJB150.11A-2009	Neutral salt spray 192 hours	Acidic Salt Spray, 192 hours		
Sand & Dust	GJB150.12A-2009	Blowing sand and dust test			
Acceleration	GJB150.15A-2009	Three-axis, six-direction; Performance test level: 9g, Structural test level: 13.5g			
Shock	GJB150.18A-2009	Three-axis, six-direction, 18 shocks total, 20g		Three-axis, six-direction, 18 shocks total, 30g	
Low Air Pressure	GJB150.2A-2009	/		6.3kPa	
Acidic Atmosphere	GJB150.28A-2009	/		Spray 2h + storage 22h per cycle, <b>3 cycles</b>	
EMC (Electromagnetic Compatibility)	GJB151B-2013	Comply with RE102 and CE102			
Power Supply Characteristics	GJB181B-2012	/		Abnormal Overvoltage 80V/50ms	
Vibration	GJB150.16A-2009	