

9733A DC Blower Fan

9733A DC Blower Fan —97.5× 95.0 × 33.0 mm

★ Structural Features

Frame & Blade Material


- Frame: Engineering Plastic
- Impeller: Engineering Plastic

Bearing Structure: Dual Ball Bearings


Weight: 175.0 g



★ Mechanical Dimensions

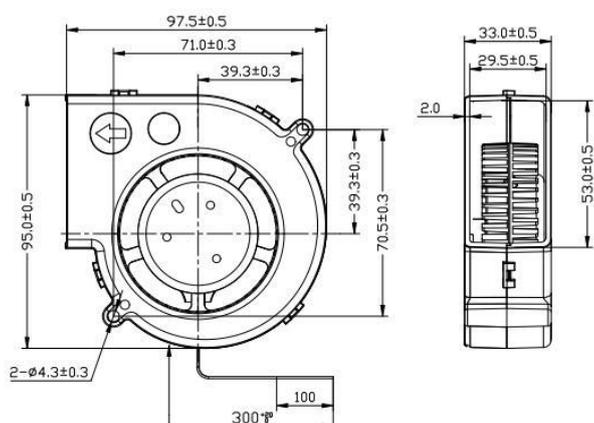

★ Airflow Performance Curve

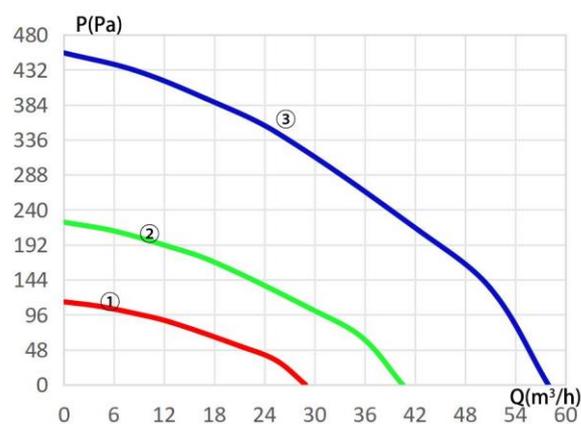

Basic Fan Specifications

| Model | Voltage (V) | Operating Voltage Range (V) | Power (W) | Speed (RPM) | Airflow (m³/h) | Static Pressure (Pa) | Noise (dBA) | Curve |
|-----------------|-------------|-----------------------------|-----------|-------------|----------------|----------------------|-------------|-------|
| J97FLW125-33A00 | 12 | 8.0~13.8 | 3.1 | 2500 | 28.9 | 113.7 | 46.7 | ① |
| J97FLW135-33A00 | 12 | 8.0~13.8 | 8.7 | 3500 | 40.5 | 223.0 | 54.1 | ② |
| J97FLW150-33A00 | 12 | 8.0~13.8 | 26.1 | 5000 | 57.9 | 455.2 | 61.8 | ③ |
| J97FLW225-33A00 | 24 | 16.0~27.6 | 3.1 | 2500 | 28.9 | 113.7 | 46.7 | ① |
| J97FLW235-33A00 | 24 | 16.0~27.6 | 8.7 | 3500 | 40.5 | 223.0 | 54.1 | ② |
| J97FLW250-33A00 | 24 | 16.0~27.6 | 26.1 | 5000 | 57.9 | 455.2 | 61.8 | ③ |
| J97FLW325-33A00 | 28 | 18.0~32.0 | 3.1 | 2500 | 28.9 | 113.7 | 46.7 | ① |
| J97FLW335-33A00 | 28 | 18.0~32.0 | 8.7 | 3500 | 40.5 | 223.0 | 54.1 | ② |
| J97FLW350-33A00 | 28 | 18.0~32.0 | 26.1 | 5000 | 57.9 | 455.2 | 61.8 | ③ |

- **Notes:** Available voltage options: **5V, 12V, 24V, 28V, 48V**
- In the model number, the **second digit from the end “0”** indicates the **signal function**, and the **last digit “0”** indicates the **environmental performance rating**.
- Users may select according to actual requirements based on **Table 1** and **Table 2**.

Table 1: Signal Functions

| Signal function code | 0 | 1 | 2 | 3 | 4 | 5 |
|----------------------|-------------|------------------------------|------------------------|---------------------------|---|--|
| Function Description | No Function | PWM Duty Cycle Speed Control | High-Level Fault Alarm | Tachometer (RPM) Feedback | PWM Duty Cycle Control + High-Level Fault Alarm | PWM Duty Cycle Control + Tachometer Feedback |

Table 2: Environmental Adaptability Ratings

| Code | Application Standard | 0 (Ground / Vehicle-Mounted) | 1 (Marine / Naval Applications) |
|-------------------------------------|----------------------|--|---------------------------------|
| High Temperature | GJB150.3A-2009 | Storage: 80°C, Operation: 75°C | |
| Low Temperature | GJB150.4A-2009 | Storage: -50°C, Operation: -40°C | |
| Rain / Water Ingress | GJB150.8A-2009 | Enhanced, 1 hour per surface | |
| Damp Heat (Humidity) | GJB150.9A-2009 | Cyclic humidity: 30°C-60°C, RH 95%±5%, 24h per cycle, 10 cycles | |
| Fungus Resistance | GJB150.10A-2009 | Fungus group 1 or group 2, 28 days | |
| Salt Spray | GJB150.11A-2009 | Neutral salt spray 192 hours | Acidic Salt Spray, 192 hours |
| Sand & Dust | GJB150.12A-2009 | Blowing sand and dust test | |
| Acceleration | GJB150.15A-2009 | Three-axis, six-direction; Performance test level: 9g, Structural test level: 13.5g | |
| Shock | GJB150.18A-2009 | Three-axis, six-direction, 18 shocks total, 20g | |
| Low Air Pressure | GJB150.2A-2009 | / | |
| Acidic Atmosphere | GJB150.28A-2009 | / | |
| EMC (Electromagnetic Compatibility) | GJB151B-2013 | / | |
| Power Supply Characteristics | GJB181B-2012 | / | |
| Vibration | GJB150.16A-2009 | | |